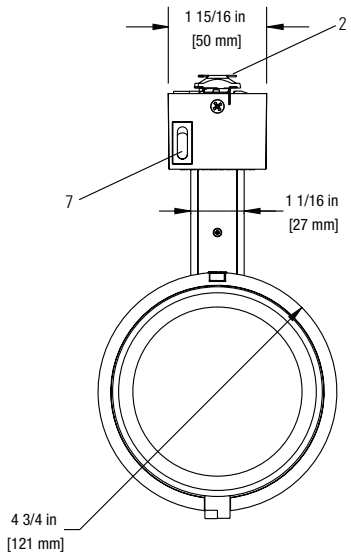

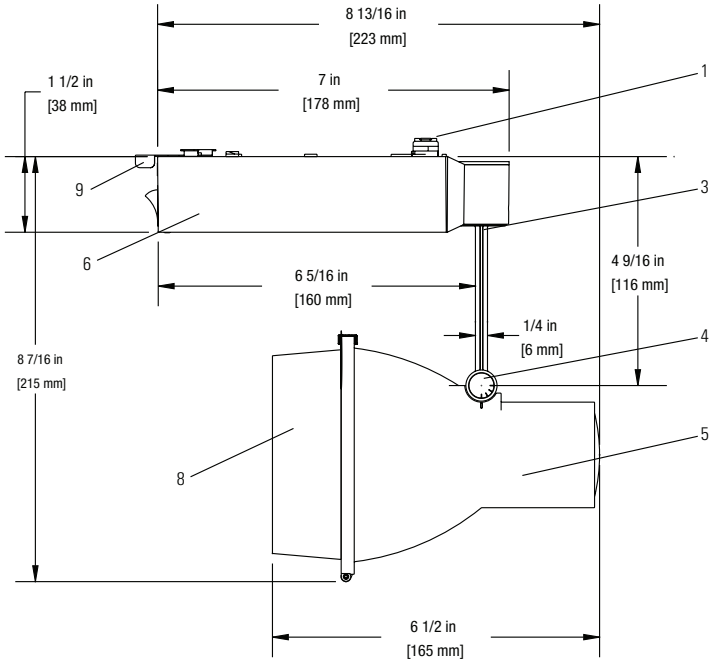

Ordering Information

Catalog Number	Finish	Mounting	Lamps
23S39P3AL	Aluminum	For use with Lytespan Radius, Basic and Advent Not compatible with monopoints, extension wands or slope ceiling adapters. For monopoint applications refer to Spec Sheet 6173.	39W PAR30L Ceramic Metal Halide
23S39P3BK	Black		
23S39P3WH	White		

Features

1. **Track Attachment Fitting:** Locking lever for mechanical/ electrical connection.
2. **Brass Contact:** Extends for connection to second circuit (Advent track only).
3. **Horizontal Pivot:** Wireless stem profile with 365° horizontal rotation. Position may be locked using an allen key.
4. **Vertical Pivot:** 0-90° vertical adjustment with aiming indicator. Position may be locked using an allen key.
5. **Fixture Housing:** Die cast aluminum
6. **Ballast Housing:** Molded polycarbonate
7. **On/Off Switch:** Rocker switch to disconnect power to the ballast.
8. **Accessory Cartridge:** Hinged and captive; retaining ring included. Inside painted black to reduce glare.
9. **Safety Locking Lever:** Locks ballast housing to track.

Finish

All Painted finishes are baked enamel.

Accessories

Accessory Holder: Integral
Accessories: Accepts 1 snoot plus 2 lenses or 1 louver plus 1 lens. Louver can be used without lens.
Lens: AF3, ADF3 Series
Louver: AL3HC

Electrical

Electronic Ballast
Input Voltage: 120V, 50/60Hz
Power Factor: 0.9
Input Power: 45W
Max. Input Current: 0.40A
ANSI Code: M130
Do not use on dimming circuit.

Labels

UL, cUL

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0808

Aiming Angle:

L Beam length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.

Lamp data shown is typical. Consult lamp manufacturers for availability and performance.
CBCP = Center Beam Candle Power.









Lamp	Beam Spread (To 50% CBCP)	CBCP	Rated Life (Hrs.)	0° D	0° FC	0° L	0° W	30° Horizontal D	30° Horizontal C	30° Horizontal FC	30° Horizontal L	30° Horizontal W	30° Vertical D	30° Vertical C	30° Vertical FC	30° Vertical L	30° Vertical W	45° Vertical D	45° Vertical C	45° Vertical FC	45° Vertical L	45° Vertical W
GE CMH39PAR30L/SP10	10°	39600	10000	12'	275	2.1'	2.1'	12'	6.9'	179	2.8'	2.4'	5'	8.7'	198	3.6'	1.7'	7'	7.0'	286	2.5'	1.7'
				14'	202	2.4'	2.4'	14'	8.1'	131	3.3'	2.8'	6'	10.4'	138	4.3'	2.1'	8'	8.0'	219	2.8'	2.0'
				16'	155	2.8'	2.8'	16'	9.2'	100	3.7'	3.2'	7'	12.1'	101	5.0'	2.4'	9	9.0'	173	3.2'	2.2'
				18'	122	3.1'	3.1'	18'	10.4'	79	4.2'	3.6'	8'	13.9'	77	5.7'	2.8'	10'	10.0'	140	3.5'	2.5'
GE CMH39PAR30L/SP15	15°	2900	10000	12'	201	3.2'	3.2'	12'	6.9'	131	4.2'	3.6'	5'	8.7'	145	5.6'	2.6'	7'	7.0'	209	3.8'	2.6'
				14'	148	3.7'	3.7'	14'	8.1'	96	4.9'	4.3'	6'	10.4'	101	6.7'	3.2'	8'	8.0'	160	4.3'	3.0'
				16'	113	4.2'	4.2'	16'	9.2'	74	5.6'	4.9'	7'	12.1'	74	7.8'	3.7'	9	9.0'	127	4.8'	3.4'
				18'	90	4.7'	4.7'	18'	10.4'	58	6.4'	5.5'	8'	13.9'	57	8.9'	4.2'	10'	10.0'	103	5.4'	3.7'
GE CMH39PAR30L/FL25	25°	11000	10000	8'	172	3.5'	3.5'	8'	4.6'	112	4.8'	4.1'	3'	5.2'	153	6.2'	2.7'	5'	5.0'	156	4.7'	3.1'
				10'	110	4.4'	4.4'	10'	5.8'	71	6.0'	5.1'	4'	6.9'	86	8.3'	3.5'	6'	6.0'	108	5.6'	3.8'
				12'	76	5.3'	5.3'	12'	6.9'	50	7.2'	6.1'	5'	8.7'	55	10.4'	4.4'	7'	7.0'	79	6.5'	4.4'
				14'	56	6.2'	6.2'	14'	8.1'	36	8.4'	7.2'	6'	10.4'	38	12.5'	5.3'	8'	8.0'	61	7.5'	5.0'
Sylvania CMH39PAR30L/SP10	10°	36900	12000	12'	275	2.1'	2.1'	12'	6.9'	179	2.8'	2.4'	5'	8.7'	198	3.6'	1.7'	7'	7.0'	286	2.5'	1.7'
				14'	202	2.4'	2.4'	14'	8.1'	131	3.3'	2.8'	6'	10.4'	138	4.3'	2.1'	8'	8.0'	219	2.8'	2.0'
				16'	155	2.8'	2.8'	16'	9.2'	100	3.7'	3.2'	7'	12.1'	101	5.0'	2.4'	9	9.0'	173	3.2'	2.2'
				18'	122	3.1'	3.1'	18'	10.4'	79	4.2'	3.6'	8'	13.9'	77	5.7'	2.8'	10'	10.0'	140	3.5'	2.5'
Sylvania CMH39PAR30L/FL30	30°	8000	12000	8'	125	4.3'	4.3'	8'	4.6'	81	5.9'	5.0'	3'	5.2'	111	8.2'	3.2'	5'	5.0'	113	5.8'	3.8'
				10'	80	5.4'	5.4'	10'	5.8'	52	7.3'	6.2'	4'	6.9'	63	10.9'	4.3'	6'	6.0'	79	6.9'	4.5'
				12'	56	6.4'	6.4'	12'	6.9'	36	8.8'	7.4'	5'	8.7'	40	13.7'	5.4'	7'	7.0'	58	8.1'	5.3'
				14'	41	7.5'	7.5'	14'	8.1'	27	10.2'	8.7'	6'	10.4'	28	16.4'	6.4'	8'	8.0'	44	9.2'	6.1'
Philips CMH35PAR30L/SP10	10°	44000	9000	12'	306	2.1'	2.1'	12'	6.9'	198	2.8'	2.4'	5'	8.7'	220	3.6'	1.7'	7'	7.0'	317	2.5'	1.7'
				14'	224	2.4'	2.4'	14'	8.1'	146	3.3'	2.8'	6'	10.4'	153	4.3'	2.1'	8'	8.0'	243	2.8'	2.0'
				16'	172	2.8'	2.8'	16'	9.2'	112	3.7'	3.2'	7'	12.1'	112	5.0'	2.4'	9	9.0'	192	3.2'	2.2'
				18'	136	3.1'	3.1'	18'	10.4'	88	4.2'	3.6'	8'	13.9'	86	5.7'	2.8'	10'	10.0'	156	3.5'	2.5'
Philips CMH35PAR30L/FL30	30°	7400	9000	8'	116	4.3'	4.3'	8'	4.6'	75	5.9'	5.0'	3'	5.2'	103	8.2'	3.2'	5'	5.0'	105	5.8'	3.8'
				10'	74	5.4'	5.4'	10'	5.8'	48	7.3'	6.2'	4'	6.9'	58	10.9'	4.3'	6'	6.0'	73	6.9'	4.5'
				12'	51	6.4'	6.4'	12'	6.9'	33	8.8'	7.4'	5'	8.7'	37	13.7'	5.4'	7'	7.0'	53	8.1'	5.3'
				14'	38	7.5'	7.5'	14'	8.1'	25	10.2'	8.7'	6'	10.4'	26	16.4'	6.4'	8'	8.0'	41	9.2'	6.1'

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0808